



# Trailer Plug & Base Wiring Diagrams

## 7 Pin wiring diagram for flat trailer plugs & bases

### Plug




### Base

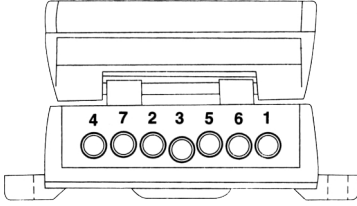


1. Left Indicator (Yellow)
2. Auxiliary (Black)
3. Earth (White)
4. Right Indicator ( Green)
5. Auxiliary (Blue)
6. Stop Lamp (Red)
7. Tail No. Plate & Clearance (Brown)

## 7 Pin wiring diagram for large round trailer plugs & bases

### Plug




### Base




1. Left Indicator (Yellow)
2. Auxiliary (Black)
3. Earth (White)
4. Right Indicator ( Green)
5. Auxiliary (Blue)
6. Stop Lamp (Red)
7. Tail No. Plate & Clearance (Brown)

## 7 Pin wiring diagram for small round trailer plugs & bases

### Plug




### Base




1. Left Indicator (Yellow)
2. Auxiliary (Black)
3. Earth (White)
4. Right Indicator ( Green)
5. Auxiliary (Blue)
6. Stop Lamp (Red)
7. Tail No. Plate & Clearance (Brown)

## 6 Pin wiring diagram for small round trailer plugs & bases

### Plug




### Base




1. Tail No. Plate & Clearance (Brown)
2. Left Indicator (Yellow)
3. Right Indicator ( Green)
4. Stop Lamp (Red)
5. Auxiliary (Blue)
6. Earth (White)

## 5 Pin wiring diagram for large round trailer plugs & bases

### Plug



### Base



2. Left Indicator (Yellow)
3. Earth (White)
5. Right Indicator ( Green)
6. Stop Lamp (Red)
7. Tail No. Plate & Clearance (Brown)